

Auxiliary equipment
For plastic injection machine

AMD-P SERIES CHAMBER DRYER

箱型干燥机



AMD-P

AMD-P series of chamber dryers are used to simultaneously dry different kinds plastics in small quantity or material for trial moulding. They can be applied in dustries of electronic engineering, electroplating, pharmacy, paint baking, printing industries and etc. for preheating or drying related products.

AMD-P箱型干燥机适用于所有种类的聚合物材料烘干，并能同时烘干不同的材料，非常适合于少量、多样性的原料或试模时使用，也可用于电子、电机、电镀、烤漆、印刷等多行业相关产品的预热或干燥处理。


机器特点

- 采用P.I.D.温度控制，达到精密的均匀的烘干效果。
- 保温密封门可保持恒定的温度并降低热量损耗。
- 不锈钢材料的烤盘及内胆，可防止在烘干过程中污染原料。
- 优化设计，方便维修保养。
- 入风口、排风口采用可调式空气阀门，便于调节风量。
- 配置马达过载保护。
- 24小时定时装置，操作方便。
- 配备独立温度控制器，超温保护警示。
- 可依需求定制烤盘或整机特制。

The characters of the machine

- P.I.D. temperature control so as to achieve an accurate even drying effect.
- Air tight insulating door can keep temperature constant inside and reduce energy consumption.
- Stainless steel tray and liner bring no contamination to material.
- Optimized design so as to repair and maintain easily.
- Adjustable air valve at air inlet and outlet so as to adjust wind strength.
- Overload protection on motor.
- 24-hour timer, easy to operate.
- Equipped with separate temperature controller and alarm for overheat.
- Tray and whole dryer can be custom-made according your specifications.

The floor plan

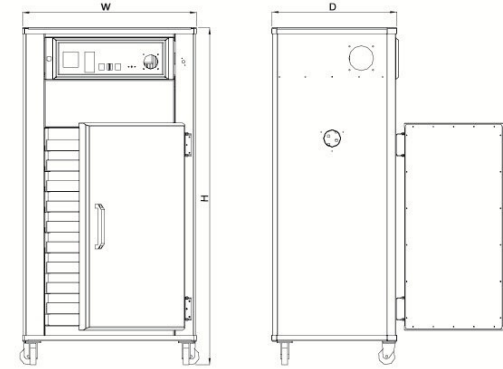

► Specifications 规格表

机型	Model		AMD-5P	AMD-9P	AMD-20P
电热功率	Heat Power	Kw	4	4.5	9
风车马达	Blower Power	Kw	0.37	0.37	1.5
温控范围	Temperature Range	°C	250	250	250
盘架数	Shelf Qty	plate	5	9	20
装料量	Loading Capa	Kg	50	100	200
内部尺寸 HxWxD	Internal Size (HxWxD)	mm	580x580x500	880x580x500	1000x970x800
外部尺寸 HxWxD	External Size (HxWxD)	mm	1200x780x600	1500x780x650	1750x1210x950
重量	Weight	Kg	126	168	380

产品规格若有变更,恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注: 1) *机器电压规格为3Ø,220V/380V,50Hz。

The machine voltage specification is 3Ø,220/380V,50Hz.
The voltage can be changed as you require.