

Auxiliary equipment
For plastic injection machine

material handling




AML SERIES VACUUM AUTO-LOADER

真空自动填料机

AML series auto-charging machine uses stainless steel charge basket and high-efficiency vacuum motor and motor overload protection device and material shortage auto-alarming device, it has the characters of light and durable, strong suck force, simple and easy for installation, and operation.

AML系列自动填料机均采用不锈钢料斗，高效率真空马达，并装有马达过载保护装置及缺料自动报警器，兼具轻便耐用、吸力强、安装简便、操作容易等特性。

▶ AML-300G




机器特点

- 主机与料桶采用分离式设计，安全简便。
- 不锈钢储料桶，轻便耐用好清料。
- 马达配有过载保护装置。
- 微电脑控制运转，操作简单。
- 独立滤清器装置，方便清除积尘。
- 静音装置，减低运转噪音。
- 缺料自动蜂鸣报警保护装置。

The characters of the machine

- The separable design of main machine with charge basket, safe and convenient.
- Stainless steel charge basket, light, durable, easy for material clean.
- The overload device on motor.
- Computer control operation, simple and easy for operation.
- Independent filter cleaner, convenient for accumulated dust cleaning.
- Quiet device, reduce the operation noise.
- The material shortage auto-alarming protection device.

The floor plan

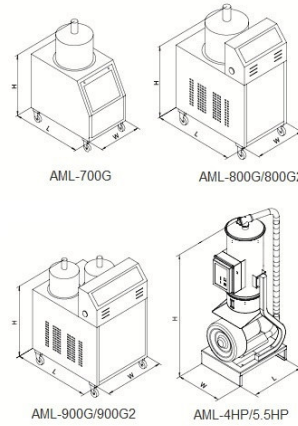

AML-700G

AML-800G/800G2

AML-4HP/5.5HP

▶ Specifications 规格表

型号 Model	马达Motor		输送能力 Conveying Capacity (kg/hr)	料斗量 Capacity of charge basket (L)	输料管内径 Inside diameter of conveying(mm)	外型尺寸External size(mm)		重量Weight (KG)	
	型式 Type	规格 Specificatio				主体Main body H x L x W	料斗hopper H x L x W	主体 Main body	料斗 Hopper
AML-300G	碳刷式 Carbon Brush	1100w 1Ø	300	6	Ø38	550x400x350		11	
AML-400G	感应式 Induction	1.5HP 3Ø	400	10	Ø38	800x450x450		25	
AML-700G	碳刷式 Carbon Brush	1100w 1Ø	300	6	Ø38	550x450x300	450x350x250	16	5
AML-800G	感应式 Induction	2HP 3Ø	300	6	Ø38	650x450x400	450x350x250	40	5
AML-800G2	感应式 Induction	3HP 3Ø	550	12	Ø38	650x450x400	500x450x300	55	6
AML-4HP	感应式 Induction	4HP 3Ø	750	20	Ø51	1400x500x500	800x450x300	75	8
AML-5.5HP	感应式 Induction	5.5HP 3Ø	900	20	Ø51	1400x500x500	800x450x300	80	8
AML-900G	感应式 Induction	2HP 3Ø	300	6x6	Ø38	750x450x400	450x350x250	45	6
AML-900G2	感应式 Induction	3HP 3Ø	550	12x12	Ø38	750x450x400	450x350x250	55	6

产品规格若有变更，恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注:
1) The test condition of conveying capacity: Height 4 meters, distance 1 meter.
2) AML-P vacuum hopper is standard allocation, AML-E infrared hopper is optional purchase

1) 输送能力测试条件为：高度4m，长度1m。
2) 标配料斗为 AML-P 真空料斗，可以选配 AML-E 电眼料斗。