

Auxiliary equipment
For plastic injection machine

AMG-P

Plastic-pipe granulator

管材粉碎机



▶ AMG-600P

Description:

AMG-P plastic pipe granulators, and are mainly used to directly granulate the PVC and PE tubings, PVC sectional and profiled bar. The machine is applicable for crushing long pipes and profiles. The equipped with suction conveying and cyclone dust separator system bring recycling efficiency into full play.

AMG-P系列为管材粉碎机，主要用于PVC、PE塑料管材、型材等异型材直接破碎造料，更适用于较长塑料管材型、材破碎，配置抽料风机、旋风分离器等组成塑料粉碎回收系统可更加充分发挥破碎机回收效率。

Close-up 特写




▶ AMG-600P Blades

机器特点

- 分体式机体，使更换刀具简单快捷；
- 特有的刀片结构，剪刀原理，减轻马达负荷，配合强悍的高转速马达，可轻松破碎各类塑料；
- 刀具间隙可调节，用钝后可重复拆下刃磨，经久耐用；
- 外置轴承座，防止粉尘进入轴承，延长机器的使用寿命；
- 进料斗与上箱的开启采用电动式开启，平稳且省力；
- 电机设有过载保护，保护电机安全；
- 安装避震脚，降低震动噪音。

The characters of the machine

- Split the body, change the screen mesh and tools easily and quickly;
- Special cutter design adopting shear principle, made of high-chromium shred, crush various plastics wastes easily;
- The gap of knives is adjustable, they can be dismantled when they have been unsharpened, and to be used repeatedly, long time using life;
- The outer bearing seat, prevent dust from entering the bearing, prolong the service life of the machine;
- The feeding hopper and upside cutting chamber are opened by electric motor driven system, smooth and effort;
- Overload protector for motor and interlock protection device, double protection for the safety of workers and motor;
- With vibration-resistant feet, reduce the noise of vibration;

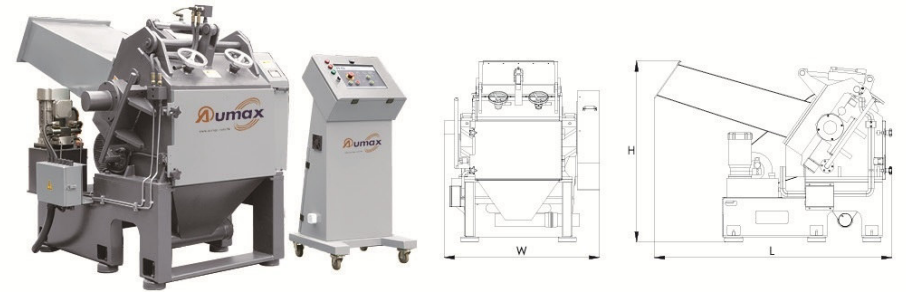

▶ AMG-600P

Specifications 规格表

机型 Model		管材粉碎机 Plastic-pipe granulator	
		AMG-600P	
电机功率 Power	kw		15
主轴转速 Rotor speed	rpm		560
转动刀 Rotating blades	pcs		6
固定刀 Fixed blades	pcs		4
筛网孔径 Screen Diameter	mm		φ 12
进料口尺寸 Feeding mouth	mm		260 × 540
粉碎室尺寸 Cutting chamber	mm		320 × 600
粉碎能力 Output	kg/h		300 ~ 600
粉碎时噪音 Noise	dB(A)		80 ~ 95
人工接料箱 Material Box			●
进料斗液压起落 Hydraulic Controller for Feeding-hopper			●
粉尘分离系统 Dust Separator System			○
风机送料系统 Blower Conveying Device			○
重量 Weight	kg		1170
外形尺寸 External size			
L	mm		1830
W	mm		1200
H	mm		1400

产品规格若有变更，恕不另行通知。Please excuse for not note if some specifications of products are changed.

Note 注: 1) ● "●" is standard allocation, "○" is selection purchase.

- 2) The max. Crushing capacity depend on the mesh hole diameter and crushing material quality.
- 3) The varied noise depend on varied crushing material.
- 4) The standard power voltage is 3φ 380V 50Hz; other voltage is available.

1) ● "●" 为标配件, "○" 为选购件。

- 2) 最大粉碎量取决于筛网孔径和粉碎材料等因素。
- 3) 粉碎时噪音因粉碎材料不同而异。
- 4) 机器电压规格为 3φ 380V 50Hz。